



Competition Regulations

2009-2010

Rules Governing Model Aviation Competition in the United States

Control Line General

Amendment Listing

Original Issue	1/1/2009	Publication of Competition Regulations
Page CLG-3	1/7/2009	Removal of duplicate illustration

Control Line

CONTROL LINE, GENERAL

Note: For FAI events, see the FAI Sporting Code.

The FAI Sporting Code may be obtained from AMA Headquarters upon request. (When FAI events are flown at AMA sanctioned contests, the common practice is to only use the basic model specifications and related items, such as timing procedures, from the FAI rules. Contest management and procedures usually follow the basic rule structure found in the General sections and specific category sections of the AMA *Competition Regulations* book.)

1. Applicability. In addition to the following General Control Line rules and the specific rules for each Control Line event, Control Line model aircraft construction, flying, and competition are also governed by the rules of the following sections: Sanctioned Competition, Records, Selection of Champions, and General. Although

the following general and specific rules primarily govern competitive activity in AMA events, it is strongly recommended that, in the interests of safety and consistency, they be followed in all Control Line activity.

2. General. A Control Line model is flown on one or more steel wire line(s) or metal line(s) of equivalent strength, attached to the model in a manner providing aerodynamic control of the model's elevation through manipulation of the control surfaces during flight. Such manipulation of control surfaces, and any other of the model's operational features, may be accomplished by mechanical means, by electrical impulses transmitted through the line(s), or by any other control system that does not interfere with the control of any other model or present a safety hazard to competitors or spectators. The use of radio control to accomplish any control functions on Control Line models is specifically prohibited.


ASTM A228M TENSILE REQUIREMENTS							
Music Wire Size	Diameter	Breaking Strength		Music Wire Size	Diameter	Breaking Strength	
		Min (LB)	Max (LB)			Min (LB)	Max (LB)
00	0.008	17.6	19.5	9	0.022	125.3	138.7
0	0.009	22.3	24.6	10	0.024	147.9	163.5
1	0.010	27.4	30.3	11	0.026	172.1	190.5
2	0.011	33.1	36.5	12	0.029	211.5	233.8
3	0.012	39.2	43.3	13	0.031	240.0	265.2
4	0.013	45.8	50.6	14	0.033	270.0	298.2
5	0.014	52.8	58.4	15	0.035	301.5	333.3
6	0.016	68.3	75.5	16	0.037	334.3	369.9
7	0.018	85.6	94.5	17	0.039	368.5	408.0
8	0.020	104.5	115.6				

Notes: Breaking Strength Based on Nominal Wire Diameter – Wire Tolerance
 *(This Chart Applies Only to Those Events with ASTM A228M Tensile Requirements.)

PULL TEST			
Pull Test Weight	Multiply Model Weight	Pull Test	Multiply Model Weight
	in Ounces by:		in Ounces by:
32G	2.00	52G	3.25
36G	2.25	56G	3.50
40G	2.50	60G	3.75
44G	2.75	64G	4.00
48G	3.00		

3. Size and Type of Control Handle. Control handle, fixture, or device, shall not extend more than six inches (6) beyond the hand of the operator except in cases where control is accomplished by means of twisting a line, in which case the maximum extension shall be no more than 30 inches. Unless prohibited by the rules of the particular event, control handles providing for easy adjustment of line length are permitted provided they are equipped with a positive safety lock. Lines may be stored between flights, but lengths must be measured before each official flight. Altering line length after official measurement is cause for disqualification.

4. Safety Thongs. A safety thong connecting the handle of the Control Line models to the pilot's wrist, and strong enough to prevent accidental release of the model, shall be worn during all flights of Control Line events except all Racing events. The safety thong should have a minimum amount of slack to preclude accidental release or interfering with the controls. Releasing the

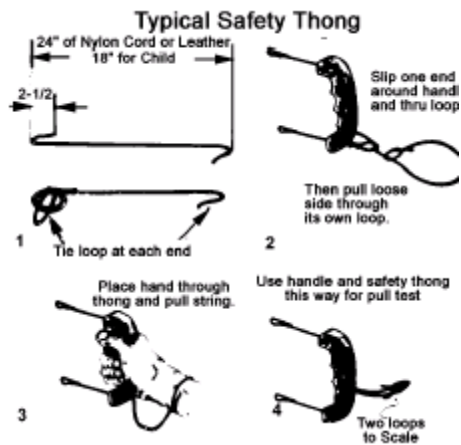

controls during flight or before the model has come to a complete stop shall constitute a foul if the safety thong restrains the model and lines from flying free; if the contestant releases the controls and the safety thong during flight or before the model has come to a complete stop, the contestant shall be barred from further participation in the event and all of his previous flights canceled. In those events not requiring the use of a safety thong, releasing the controls during flight or before the model has come to a complete stop shall bar the contestant from further participation in the event and void his previous flights in the event. The safety

thong may be a point of attachment for conducting the pull test or the thong may be tested separately from the test of control handle, lines, and control mechanism. When the thong is tested separately, it must be pulled to the test load specified for the particular model involved. The method of thong attachment shall also be able to withstand the required pull test. Failure to use a safety thong in those events for which they are required shall constitute a foul. Although safety thongs are optional in Racing events, their use is encouraged in all events, particularly when Junior and/or Senior fliers are involved.


5. Size, Construction and Measurement of Control Lines. Length, diameter, and types of lines permitted are stated under the specific rules for each event. The number and sizes of lines to be used, as specified for each event, are minimum requirements; they may be exceeded at the discretion of the contestant. However, if more and/or larger lines are used, no adjustment in the timing and/or judging procedures will be made to compensate for them. All lines used to control flights shall be steel music wire or metal of equivalent strength, in good condition, and free from kinks and rust. Line connections to handle an aircraft must have a strength equal to or greater than that of the flying lines. No swivels are to be used as part of the control system of Control Line models. Control lines shall be of uniform diameter from the lead-out connections to the handle. No more than two (2) connectors may be used per line.

5.1. Each load-bearing line connector shall have a test rating equal to at least the total pull test required on the model (i.e., if the model requires a 40-pound pull test, the connectors will have to be test rated at a minimum of 40 pounds each). The burden of proof of the test ratings of line connectors shall be the contestant's responsibility. Test ratings on factory-packed connectors will be considered as acceptable proof.

5.2. The length of the control line(s) is measured from the center point of the grip part of the control handle (device) to the fore and aft center line of the model. All speed computations are to be based on the lengths specified for the event, and no allowance is to be made where lines used exceed those lengths.

5.3. Line construction shall be as per the methods described in Figures 1 through 4. The Contest Director may allow alternate line terminations if he can satisfy himself that they are at least as strong as those shown. The

construction method shown in Figure 2A is not allowed for Jet speed models nor for speed

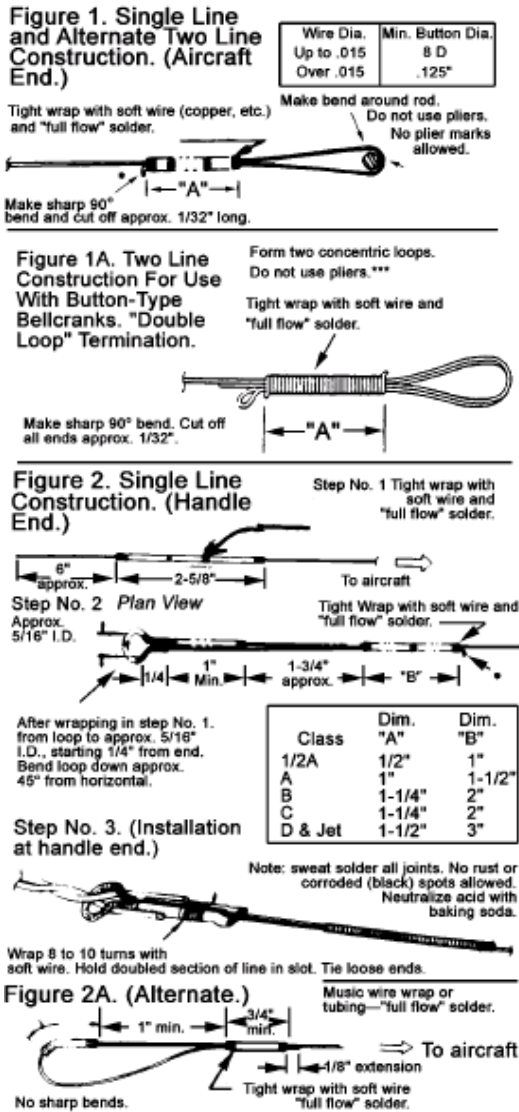

models with engine displacements over 0.4029 cubic inches.

5.3.1. The methods illustrated in Figures 1 through 3 are recommended for all applications of single strand (commonly called solid) control lines.

Line terminations using the crimped tubing style of construction, as are supplied on commercially available ready-to-use control lines, are acceptable on multistrand (commonly called stranded) lines only. Crimped tubing line terminations constructed by the modeler (i.e. not commercially available) may also be used on multistrand control lines, provided they are made

using soft tubing material such as is supplied with commercial line sets and provided they are made according to instructions provided with commercial line sets or Figure 4. It is mandatory that three line thicknesses pass through the tube before crimping. It is recommended that the crimped tubing line terminations be carefully inspected, on a regular basis, to check for possible broken strands caused by flexing of the wire against the ends of the crimped tube.

5.3.2. In those events where they are permitted, multistrand lines may also use terminations constructed as shown in Figure 3.

5.3.3. Line terminations as constructed in Figure 1 or 1A may be used for two-line single-strand applications provided buttons of suitable size and strength are used as the line connectors. See Figure 1 for minimum monoline button diameters. This shall also apply to line eyelets as shown in Figure 3. Dimension "A" will be 1/2 inch for Classes 1/2A and A, 5/8 inch for Classes B and C, and 3/4 inch for Classes D and Jet. In this rule, line connectors refer only to line connectors between control lines and leadouts and not to control lines and bellcranks.

5.3.4. For aircraft which utilize button connectors attached directly to the bellcrank, single-strand lines must employ a double-loop termination as shown in Figure 1A. Such terminations are also a permissible alternative to Figure 1 in all classes.



5.3.5. Only permanent-type end terminations and connections as shown and described in this section in paragraph 5 through 5.3.4. are permitted. Any system of using knots is specifically not considered "as strong as" those systems shown as required in 5.3. Splices at any point along the lines are not considered a "termination" and are not permitted.

The guidelines for construction of the control lines are also recommended for construction of the aircraft lead-out wires.

5.3.6. Modification of the control lines from their basic aerodynamic and mechanical configuration of separate and independent round wires or cables by coupling, fairing, or any other means is not allowed.

5.4. Measuring instruments for checking line diameter shall be capable of measuring to .0001". These measurements shall be rounded off to the nearest thousandth (.001) as follows: .0001" to .0004" shall be dropped, and .0005" to .0009" shall be rounded up to the next highest thousandth (.001).

6. Pull Test. The pull test shall be applied prior to each flight or heat by the officials or their assistants (contestants may be designated to be assistants). The control handle, safety thong (where applicable), lines, line attachment,

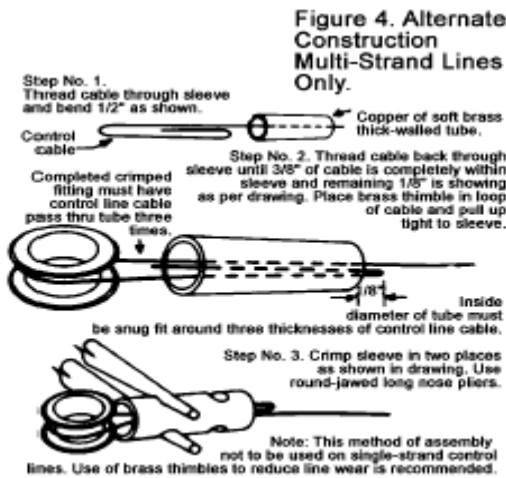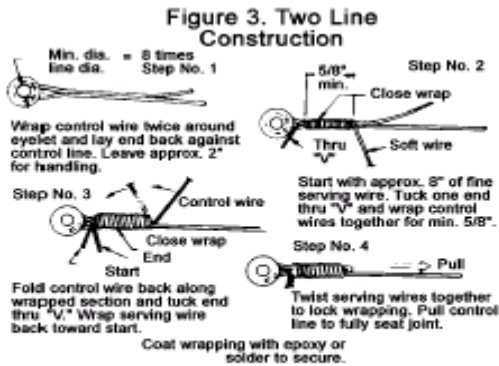

leadouts, the control mechanism and its attachments to the model shall be strong enough to withstand a pull test of the amount specified under the rules for the particular event. The pull test shall be applied by slowly increasing the pull so that no sudden load is applied. The pilot must apply the pull test, unassisted, before each attempt.

6.1. Where the control mechanism is attached to the wing, the wing may not be held during the pull test, except in the case of a Precision Aerobatics model or a fuselageless flying-wing type model, in which case the model may be held by the wing. If the control mechanism is attached to the fuselage, the model may be held by the fuselage. It is intended that the fuselage be held for the pull test unless there is no fuselage.

6.2. During the pull test before each flight, the pull test official must make a thorough

visual inspection of the aircraft's flying mechanism. If any part of the mechanism is found to be of faulty construction creating an unsafe condition or, if any gimmick is found on the aircraft which will not allow a true pull test on the aircraft's flying mechanism, this shall constitute a foul.

6.3. Non-enclosed jet engines on Jet Speed models shall receive an engine mount pull test of 48 pounds. This shall be accomplished while the pull test scales are still attached to the control handle immediately following the airplane pull test. The engine must be gripped and the pull applied in a manner that does not allow any horizontal or vertical pressure to be applied to the line(s) at the wing tip bearing point(s). This may be accomplished by grasping the tailpipe and/or head with hands paced equidistant from the wing tip bearing point(s) and a "twist" to the grip as necessary to keep the wing horizontal.

7. Safety Rules. Where a protecting barrier is not available offering complete protection, the flying area should be clear of all nonessential participants and spectators. Any contestant whose model breaks loose during a takeoff, flight, or landing (unless due to midair collision or line entanglement in multiple pilot events) shall be barred from further participation in the event, and his previous flights in the event shall be voided. A foul shall be called against a contestant when any part of his model other than the propeller(s), but including wheels and/or

Profile Fuselage Width		
Class/Event	Maximum Fuselage Width	Max Width of Additional Reinforcements
1/2A Proto	1/2 inch	3/8 inch
Scale Racing	5/8 inch	No limit
Slow Combat	3/4 inch	3/4 inch
Navy Carrier	3/4 inch	3/4 inch
Slow Rat Racing and Rat Racing	3/4 inch	No limit

tires, is lost during flight (unless due to midair collision or line entanglement in multiple pilot events).

8. Model Limitations. Unless otherwise permitted under specific event rules, no Control Line model shall have a flying weight of more than four (4) pounds.

9. Fouls. Any foul as defined in these regulations is to constitute an attempt with no official time or score being recorded. Repeated violations may be cause for revocation of a member's AMA license. Whipping the model in an event where speed is a factor in scoring shall constitute a foul.

10. Profile Definition. The fuselage of a profile model resembles that of a conventional airplane in the side (profile) view and appears as a thin flat sheet in the plan (top) view. When a conventional, single cylinder, internal combustion engine is used, the engine shall be completely exposed from the centerline of the crankshaft to the top of the cylinder head when viewed perpendicular to both the crankshaft centerline and the cylinder centerline. In the case of internal combustion engine with multiple cylinders, the preceding rule shall apply to all cylinders with allowances made by the officials for appropriate mounting of the engine. No fairing may be added to the engine which violates the "completely exposed" requirement of the previous sentences, and the engine cylinder shall not be contoured to present a streamlined cross section to the airflow. Additional reinforcements such as plywood nose doublers and cheek cowls or fairings are permitted within the width limits defined in the accompanying table. Such additional fuselage reinforcements may extend from the prop drive washer to a point 25 percent of the wing root chord back of the wing leading edge at the root and may be faired in. Cheek cowls used in Racing events may be of unlimited width, but may be used only on the side opposite the engine and only on models with side-mounted engines. In the case of inverted or upright engine installation, engine mounts may protrude from the fuselage sides beyond the width limitations of the table. They may extend no further aft than 25 percent of the wing root chord back of the leading edge at the root. Any such protruding engine mounts shall be of constant cross sectional shape and dimensions, without tapering. The rear portion of those mounts shall terminate in an angle of at least 45 degrees to the longitudinal axis of the fuselage unless they terminate within the wing structure. Nacelles, as used on multi-engine models are subject to the requirements of this definition.

11. Nominal Classification of Control Line Models. Models powered by reciprocating engine(s) are classified by total piston displacement of engine(s) as follows.

Class ½A	0000—.0504 cubic inch
Class A	.0505—.1525 cubic inch
Class B	.1526—.3051 cubic inch
Class C	.3052—.4028 cubic inch
Class D	.4029—.6500 cubic inch
Jet	Internal cross-sectional area of the tail pipe(s) at the point of minimum cross-section shall not be greater than 1.25 square inches.
Turbine	The Maximum static Thrust to Weight ratio shall be .9 (dry).

11.1. Sixty percent of the actual piston displacement of four-stroke cycle engines shall be taken for competition classification purposes.

11.2. Combination and/or modification of the above classifications is permissible within the rules for specific events and/or at individual contests (but must be so stated on sanction applications and contest announcements).

12. Records. AMA national records are recognized for each age group in Control Line Speed, CL Racing, CL Endurance, and CL Navy Carrier. The following criteria must be met to establish records in these events (also refer to each individual event section for record requirements that pertain to that event only).

12.1. Records for CL Speed and Navy Carrier may be set only during the course of normal competition flying at an outdoor A or higher-rated AMA sanctioned contest or the US FAI Team Selection Finals (for .15 FAI Speed) when all AMA record establishing requirements and procedures have been met. Endurance records may be set at any sanctioned contest or record trials which includes Control Line event(s), providing prior Contest Director concurrence has been obtained. CL Racing records may only be set at AAAA contests.

12.2. All requirements in the "Report of Record Performance" paragraph of the "Records" section of the rule book must be met. It is the flier's responsibility to see that the requirements for record application are followed through.

13. Launching. Unless otherwise specified under the rules for the particular event, any method of launching may be used provided the line(s) are fully extended during launch. Should a removable takeoff gear be used which does not fall free of the model as it becomes airborne, including drop-off gear operated by delayed action, a safety line to prevent hazard to spectators shall be provided.


13.1. The “tail wheel” of a model does not satisfactorily fulfill the requirement that “models shall have a minimum of a one-wheel landing gear.”

13.2. The “landing gear” must be the main load-supporting landing gear, and the required “one wheel” must be in reasonable proportion in size to the rest of the model.

13.3. The “one wheel” landing gear shall provide full prop clearance when the model sits in a normal unassisted “at rest” position.

13.4. When ROG is required at a contest, the model must be launched from its “at rest” position. Any other type ROG will not be considered “unassisted.”

14. Propellers. Single blade propellers, if used, must be constructed as shown in Figure 4. The metal retainer should be machined or formed to create a holding mechanism for the lead weight. The lead weight must be contained within the metal retainer. The retainer must form an integral

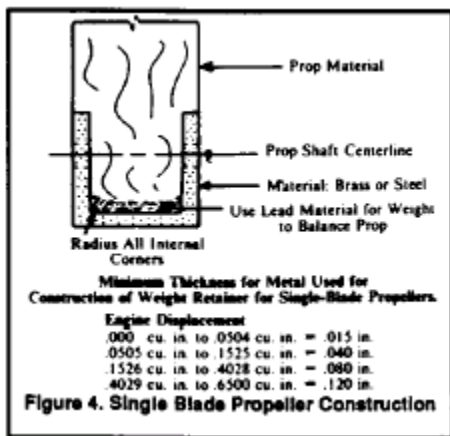

part of the single blade propeller. The intention of this retainer is

to keep the lead weight from slinging off at high engine rpm. The propeller spinner cannot be used in any way as part of the weight for the single blade propeller. Other construction techniques, if used, must be at least as safe and secure in the opinion of the CD.

15. Pressure Fuel Systems. A pressure fuel system is one in which pressure from any source is imposed on the fuel in addition to the pressures normally imposed on the fuel by gravity, centrifugal force, vent tubes bent into the airstream, and ambient atmospheric pressure.